

CLEAN ROOM 24 XL²

Exposed 24mm co-extruded grid system for clean rooms and non-magnetic areas

Key features

- Aluminium construction: non-magnetic system with high corrosion resistance
- Co-extruded gasket: better seal between tile and grid
- Class 3 performance as per ISO standard 14644-1
- Durability Class B (EN 13964)


Application areas


Healthcare, Hi-tech manufacturing

Physical data


- Material: aluminium with co-extruded flexible PVC gasket
- Surface finish: aluminium capping with baked polyester paint
- Colour: Global White

CLEAN ROOM 24 - MAIN RUNNER (bulb-to-bulb connection)



Item Nr.	Dimensions (mm)				Standard colours
	length	width	height	slot centres	
EA 794044 C	3600	24	52	300	Global white 

CLEAN ROOM 24 - CROSS TEES (stab system, butt cut)




EA 793044 C	1200	24	52	300	
EA 792044 C	600	24	52	300	

PERIMETER SOLUTION




EA 7812 C	3660	22	22	-	
-----------	------	----	----	---	---


ACCESSORIES



CHDC
Hold down clip suitable for non-magnetic areas



A 426 G
Board access clip

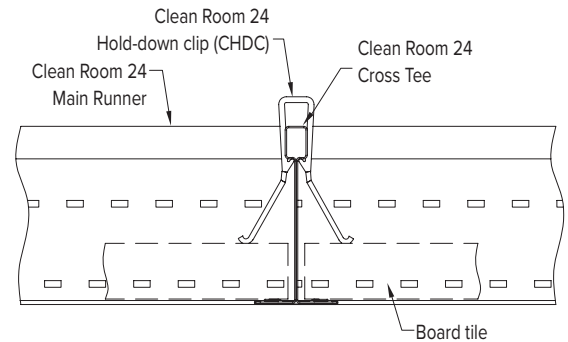

SUSTAINABILITY



FIRE REACTION



EEA Euroclass A2-s1, d0
EN 13501-1

OTHER PERFORMANCES & FEATURES



ISO 3

30 YEAR
system guarantee

